


# INSULATED FEMALE CONNECTORS 插鞘母端子

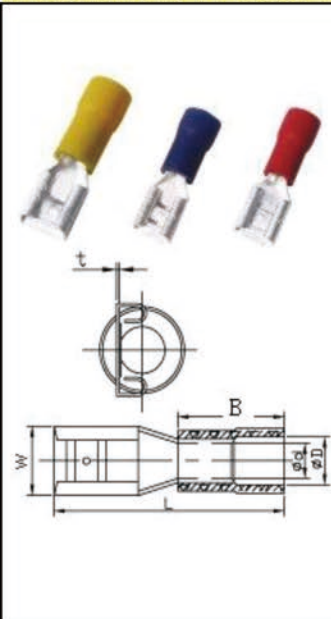

PART NO	ITEM NO	DIMENSIONS					
		W	L	t	φd	φD	B
LY0023-0001	RF110-5	3.2	18.5	0.3	1.8	3.6	10.0
LY0023-0002	RF110-8	3.2	18.5	0.3	1.8	3.6	10.0
LY0023-0003	RF187-5	5.0	19.0	0.4	1.8	3.6	10.0
LY0023-0004	RF187-8	5.0	19.0	0.4	1.8	3.6	10.0
LY0023-0005	RF250	6.6	20.3	0.4	1.8	3.8	10.0
LY0023-0006	BF110-5	3.2	18.5	0.3	2.4	4.2	10.0
LY0023-0007	BF110-8	3.2	18.5	0.3	2.4	4.2	10.0
LY0023-0008	BF187-5	5.0	19.0	0.4	2.4	4.2	10.0
LY0023-0009	BF187-8	5.0	19.0	0.4	2.4	4.2	10.0
LY0023-0010	BF250	6.6	20.3	0.4	2.4	4.2	10.0
LY0023-0011	YF110-5	3.2	22.0	0.4	3.5	5.4	13.0
LY0023-0012	YF110-8	3.2	22.0	0.4	3.5	5.4	13.0
LY0023-0013	YF187-5	5.0	22.0	0.4	3.5	5.4	13.0
LY0023-0014	YF187-8	5.0	22.0	0.4	3.5	5.4	13.0
LY0023-0015	YF250	6.6	23.3	0.4	3.5	5.4	13.0